

## 269R/270R/269SN

HOLD-UP DEVICES



Honeywell's series of hold-up devices have been designed for silent operation. Available in a stainless steel cover or hardwired, V-Plex and wireless versions, they mount quickly and easily in discreet locations. They are ideally

suited for use in locations such as banks, jewelry stores, retail establishments or any situation that requires hold-up notification.

## FEATURES

- Silent operation
- Double-pole double-throw contacts for multi-notifications
- Twin 45° screw terminals with EOL resistor splicing terminal
- Adhesive pads for temporary positioning while installing
- Stainless steel cover (269R and 269SN)
- Fully supervised
- Convenient reset key for testing and/or reset of alarm


## SPECIFICATIONS

- **Switch type**  
Plunger type DPDT
- **Switch action**  
Selectable latching or momentary
- **Switch Rating**  
0.2A @ 30VDC max.
- **Connections**  
Four position 45° screw terminal block for each output side with EOL resistor splicing terminals
- **Operating Temp**  
14° F to 140° F  
(-10° to 60°C)
- **Dimensions**  
3.5" L x 2.0" W x 1.25" D
- Listed for UL636 Hold-Up alarm units and systems

# 269R/270R/269SN

HOLD-UP DEVICES

## SPECIFICATIONS

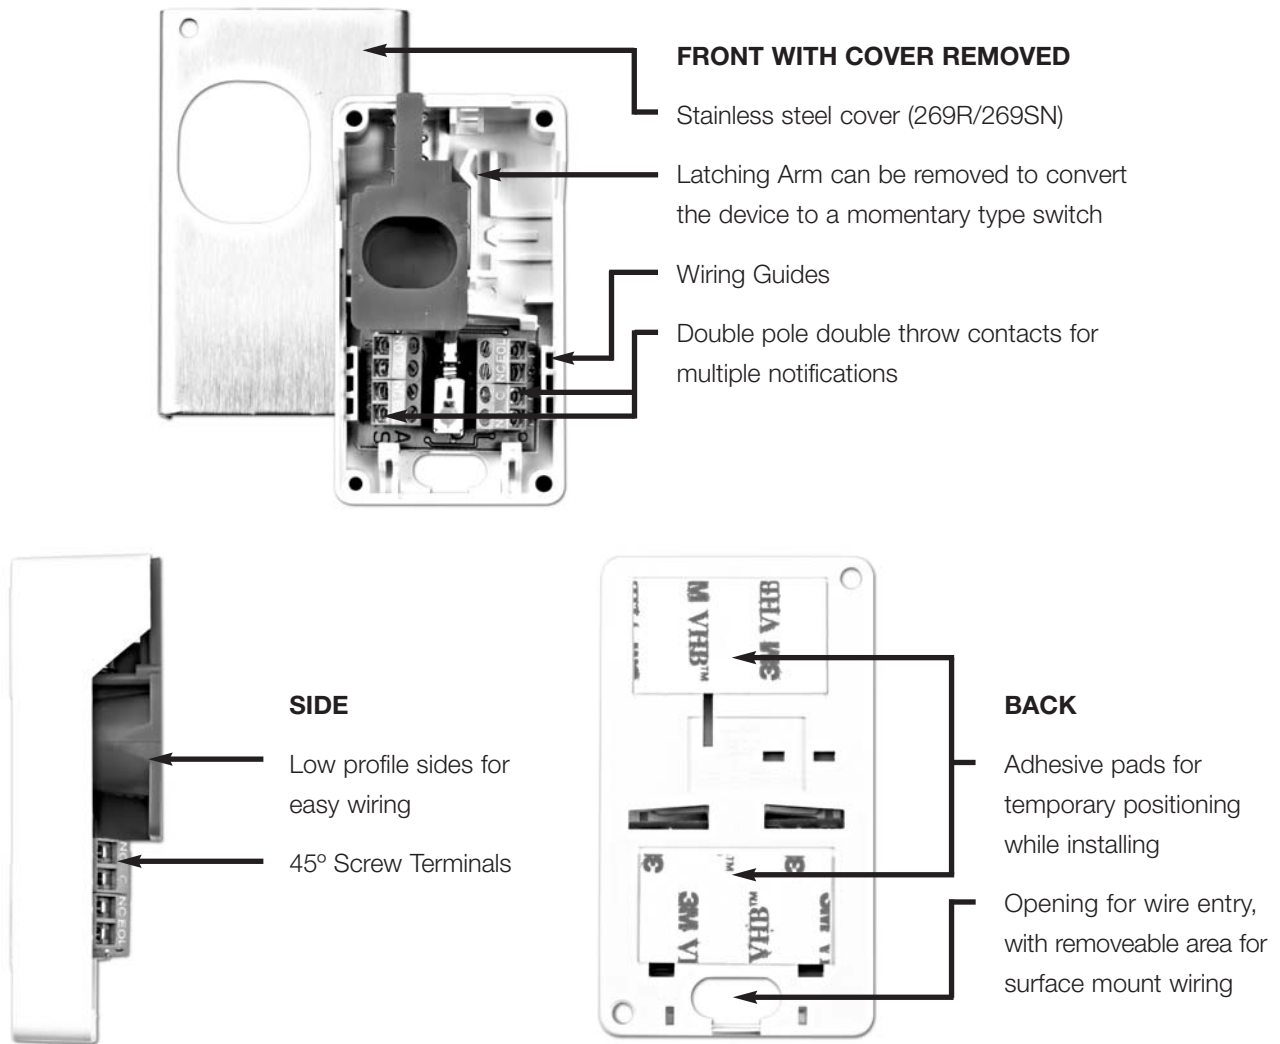

## ORDERING

<b>269R</b>	Hardwired Hold-Up switch with stainless steel cover
<b>270R</b>	Hardwired Hold-Up switch in plastic case
<b>269SN</b>	V-Plex Hold-Up switch with stainless steel cover (polling loop only)
<b>5869</b>	5800 Series Wireless Hold-Up Switch

### Honeywell Security & Custom Electronics

Honeywell International Inc.

PO Box 9035

Syosset, NY 11791

www.honeywell.com

# Honeywell

L/269SERIE/D

January 2007

© 2007 Honeywell International Inc.